


# JDC10 DC/DC模块金属壳系列

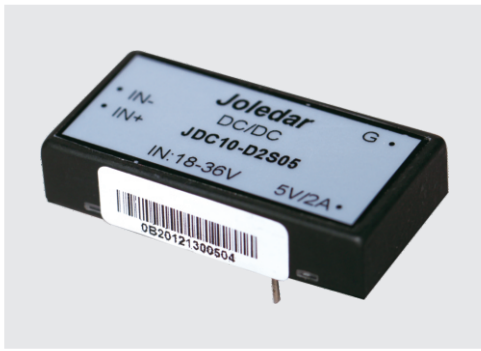

50.8 × 25.4 × 10.5mm


## 技术指示

输入电压范围: ..... 9~18VDC 18~36VDC 36~72VDC  
 输入电流: ..... 3260mA 1610mA 860mA  
 空载电流: ..... 150mA 100mA 65mA  
 输出过载保护: ..... 160%~250%打嗝模式保护, 自动恢复  
 输出过电压保护: ..... 115%~135%  
 耐压: ..... I/P-0/P: 1KVDC  
 工作温度、湿度: ..... -25℃~+70℃, 20%~90%RH, 无冷凝  
 储存温度、湿度: ..... -25℃~+105℃, 10%~95%RH  
 耐震动: ..... 10~500Hz, 2G 10分钟/周期, X、Y、Z轴各60分钟  
 安全标准: ..... 根据GB4943、UL60950、EN60950设计  
 电磁兼容: ..... 根据GB9254、EN55022 A级设计

## 规格参数

产品型号	输入电压 (V)	Vo1 / Io1	典型效率
JDC10-□S03	12,24,48	3.3V/2500mA	78%
JDC10-□S05	12,24,48	5V/2000mA	81%
JDC10-□S12	12,24,48	12V/840mA	83%
JDC10-□S15	12,24,48	15V/660mA	83%
JDC10-□S24	12,24,48	24V/420mA	83%
JDC10-□D05	12,24,48	± 5V/1000mA	81%
JDC10-□D12	12,24,48	± 12V/420mA	83%
JDC10-□D15	12,24,48	± 15V/330mA	83%
JDC10-48S05W	18~72	5V/2000mA	75%
JDC10-48S12W	18~72	12V/840mA	78%
JDC10-48S15W	18~72	15V/660mA	78%

## 安装尺寸

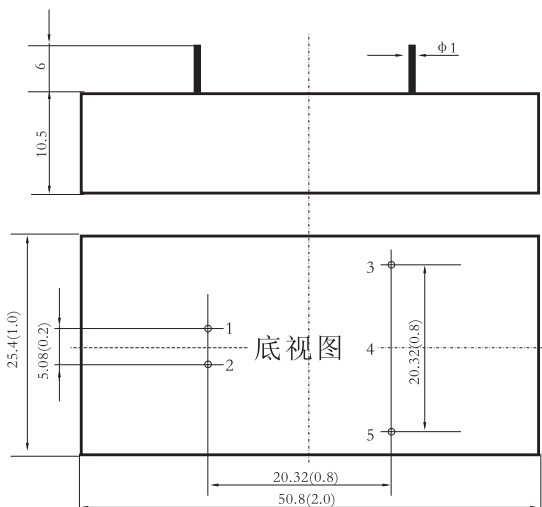

## 引脚排列

引脚号	输出	
	单路	双路
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	NoPin	COM
5	-Vout	-Vout